

LAMINATE
SERIES _____


BEAUTY OF
Simplicity



600x1200mm
GVT | PGVT
2023 COLLECTION

Made in India

Each product we manufacture is conceived and produced entirely in India with a refined design and a particular care to make the room area unique and special. Savino is an ever-evolving company with a look at the future and a continuous innovation for increasing improvement through quality and care that characterized our production. The "Made in India" value can easily be seen through the wide range of high quality products which are conceived with a unique design that combines elegance, comfort and functionality.

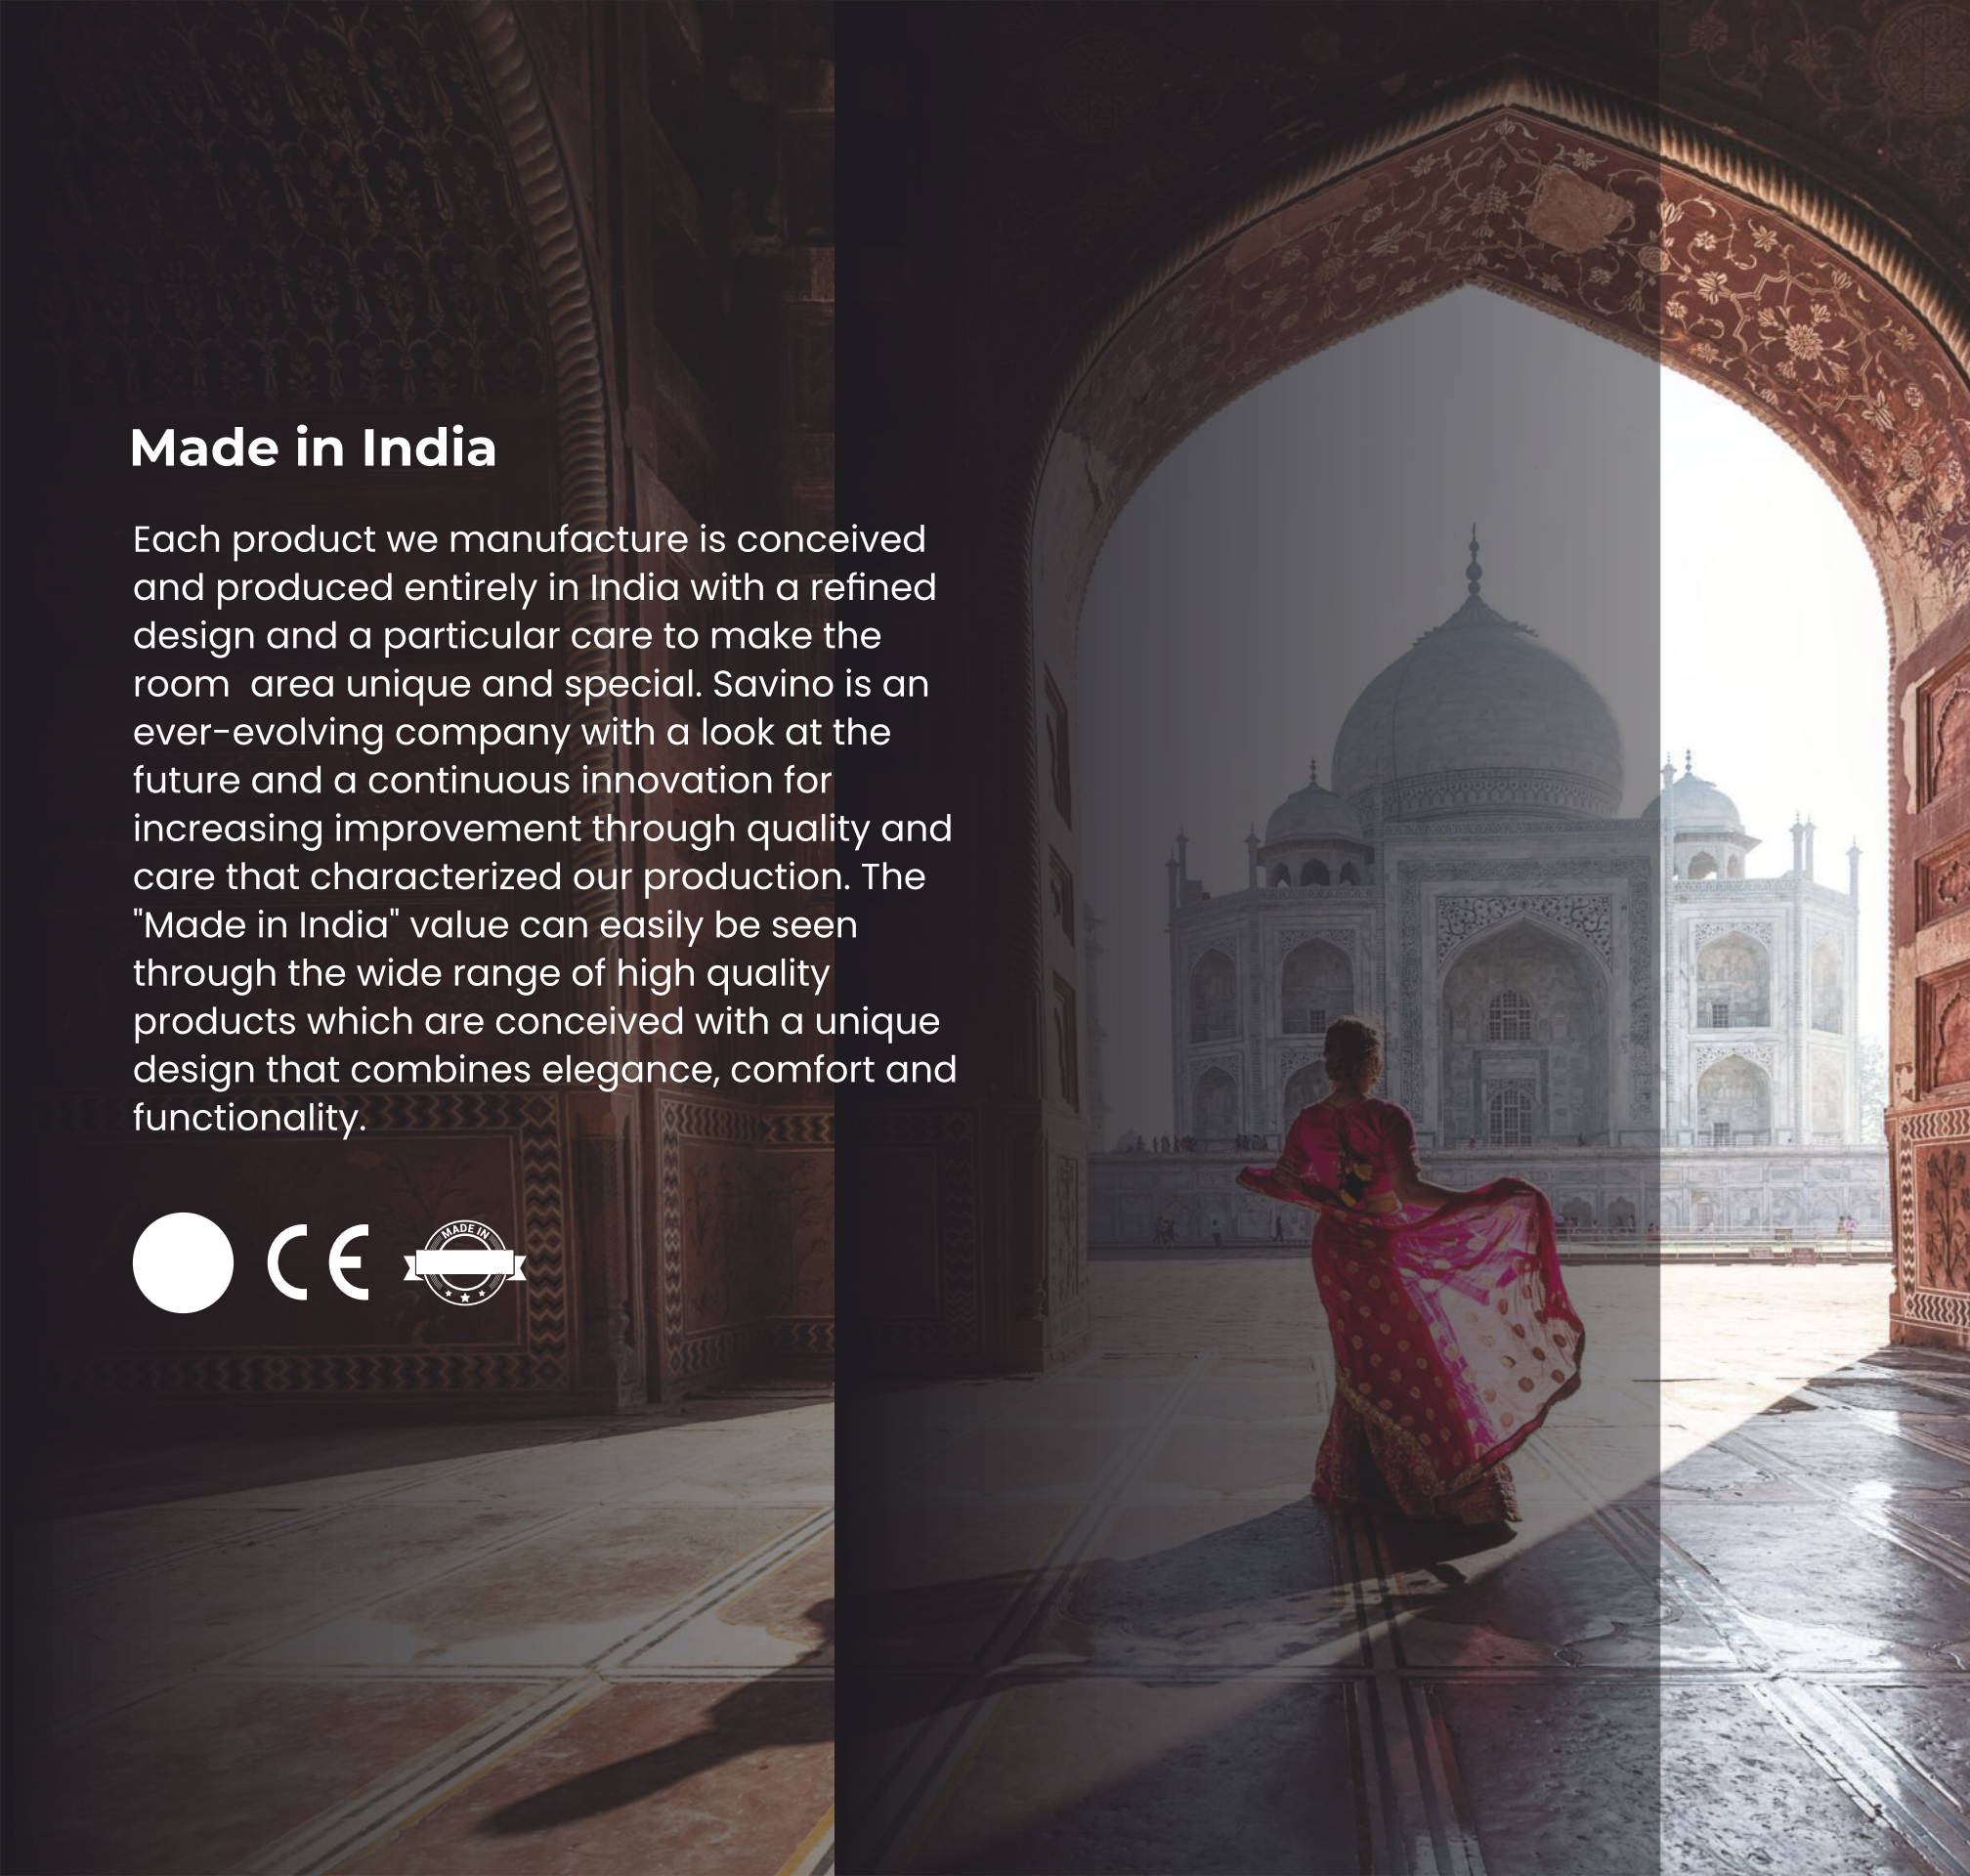

APPLICATION



RESIDENCES



GARDEN &
POOLS



HOTELS



OFFICES



RESTAURANTS



SHOPS



AIRPORTS



MALLS



SPACES
PUBLIC



RAILWAY
STATIONS



BATHROOMS



KITCHENS







AFRICAN WOOD CREMA

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



AFRICAN WOOD BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



AMAZON WOOD LIGHT

Size :
600x1200mm

Random



Thickness :
8.5mm




LAMINATE
SERIES _____



ASSAM WOOD BROWN


Size :
600x1200mm

Random

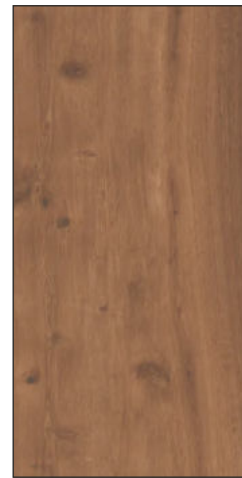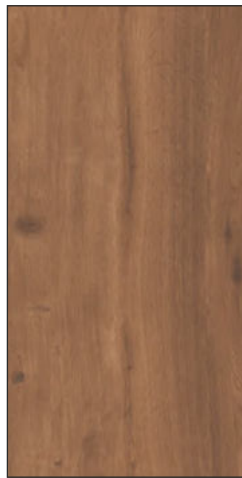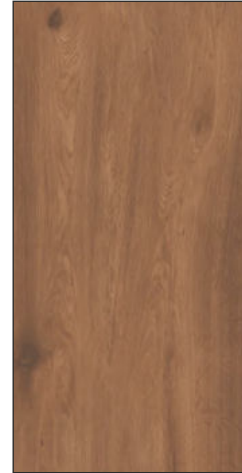

Thickness :
8.5mm


LAMINATE
SERIES _____

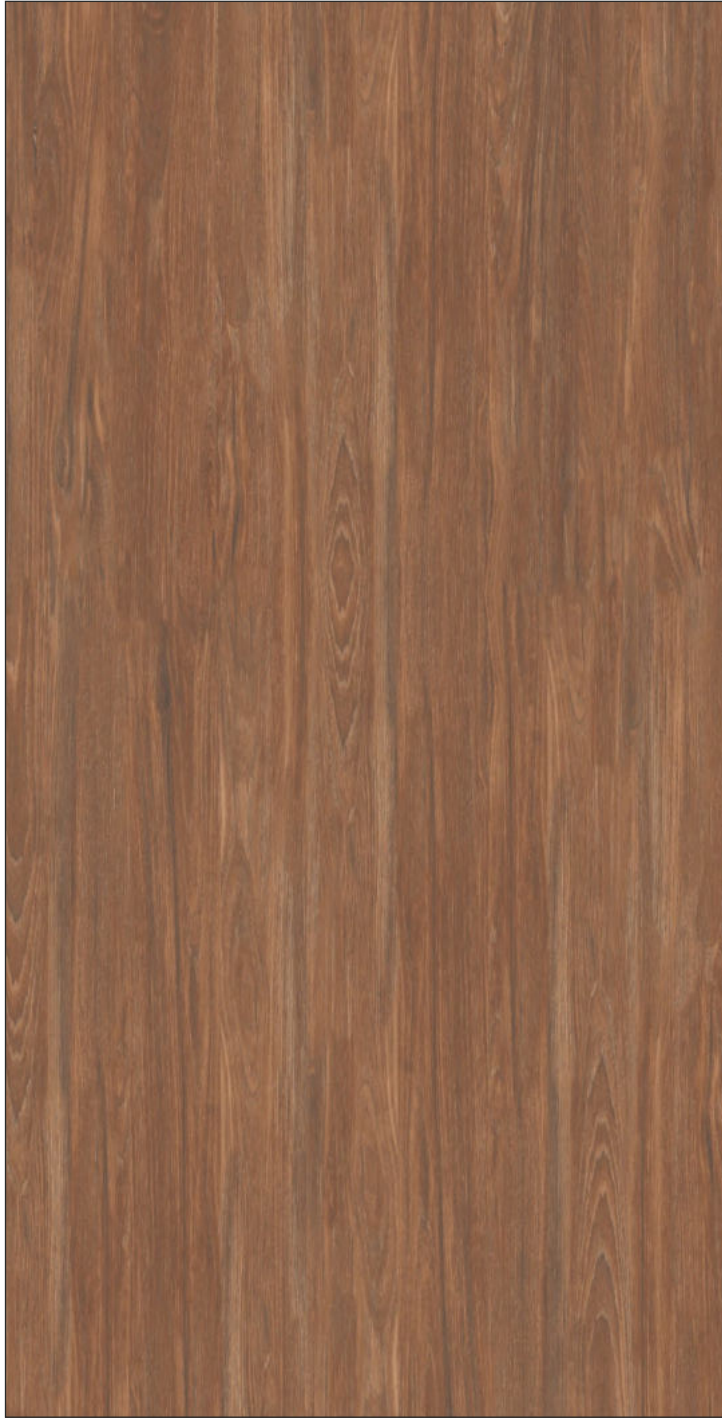

CASTELO WOOD BROWN

Size :
600x1200mm

Random

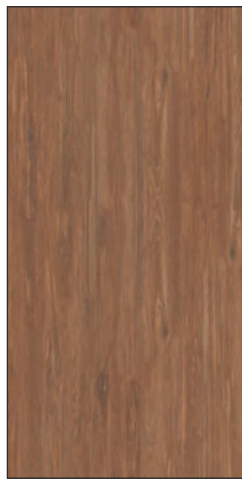

Thickness :
8.5mm

LAMINATE
SERIES _____



CELTIC BISK

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____



CIVIC BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



COUNTRY WOOD CREMA

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____








EBONY NATURAL

Size :
600x1200mm

Random

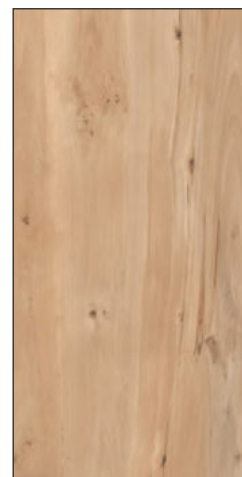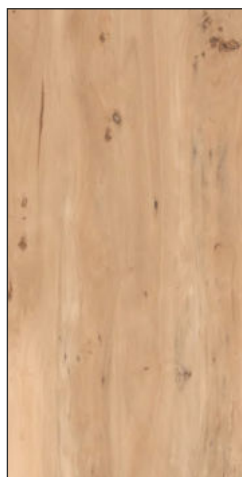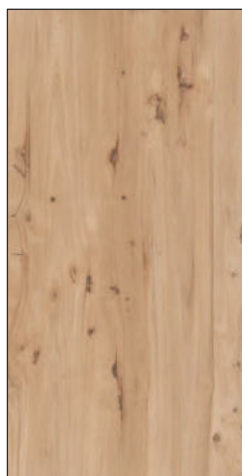

Thickness :
8.5mm

LAMINATE
SERIES _____



FLARE BEIGE

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____



LAMINA GREY

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____






MOLAVE WOOD

Size :
600x1200mm

Random

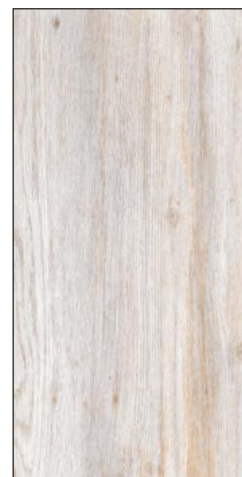

Thickness :
8.5mm

LAMINATE
SERIES _____



IRIS WOOD BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



IRIS WOOD WENGE

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____



JACK WOOD BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



TENGO WOOD BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____







TIGER WOOD

Size :
600x1200mm

Random

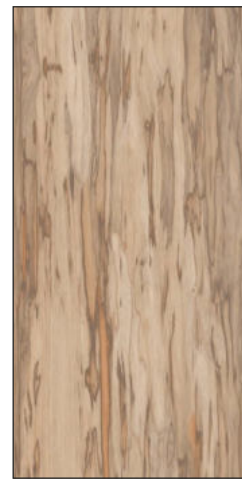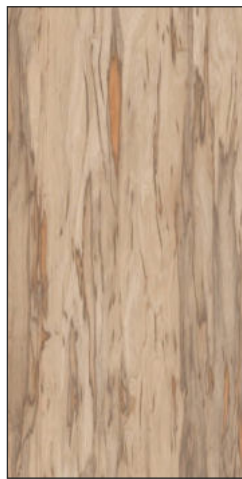

Thickness :
8.5mm

LAMINATE
SERIES _____



VANITY WOOD BLACK

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____



WINE BROWN

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATE
SERIES _____





ZIBRA WOOD NATRUL

Size :
600x1200mm

Random



Thickness :
8.5mm

LAMINATIE
SERIES _____

TECHNICAL SPECIFICATION

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.Bla	MEAN VALUE	TEST METHOD
Regulatory Properties			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 4.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.20 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.10 %	ISO 10545-2
Surface Quality	>95% defects free	>95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE <1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value >90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3< Gloss Value <7	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7< Gloss Value <18	Gloss Meter 60°
Structural Properties			
Water absorption	≤0.50 %	≤0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties			
Modulus of rupture	Min. 35.0 N/mm ²	Min. 42.0 N/mm ²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥7.5(15mm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties			
MOH'S hardness #	as per mfg.	Polished Min. 4* / Satin, Posh & Matt Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Polished Min. 2 / Satin & Posh Min. 3 / Matt Min. 4	ISO 10545-7
Deep abrasion resistance #	Max. 175mm ³	Max. 132mm ³	ISO 10545-6
Thermal Hydrometric Properties			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 10 ⁻⁶	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. 10 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLA**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed	as per mfg.	Min. Class GHB**	ISO 10545-13
Safety Properties			
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy P0(<12) / Posh ≥P1 (12-24) / Matt ≥P2(25-34)	BS 7976-2
Slip resistance(DCOF) (R value) ##	as per mfg.	R9 to R13	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.
Parameters are applicable for 1st Choice/Premium Grade Materials Only.			

PACKING DETAILS

PRODUCT	SIZE	THICKNESS	TILES / BOX
GLAZED PORCELAIN TILE	600x1200mm / 24"x 48 INCH	8.5mm	2 pcs.

