

Full
Body
tiles

EXPRESS Series

Catalogue 2024

600x
600MM



ARMANO VITRIFIED LLP

Factory Address:

Survey No. 19 & 21, Matel-Virpar Road,
At. Post - Virpar (Matel), Morbi, Gujarat, INDIA

Cell: +91 95120 33323/24/25

E-mail: info@armanovitrified.com





EXPRESS Series

Catalogue 2024



Introduction Express series

A Testament to durability and style. Engineered to withstand the rigors of high-traffic environments, these tiles offer a blend of robust construction and aesthetic appeal. From bustling corridors to tranquil home settings, the Express Series delivers unmatched performance and versatility. With its FULLBODY'S enduring color, it's the perfect choice for spaces where longevity and elegance are paramount. Elevate your projects with the reliability and charm of the Express Series.



Inspire from The Nature

Armano is one of the leading manufactures of ceramic tiles in India. We manufacture a great collection of fullbody tiles that come in various styles and sizes. The surfaces from Armano have a charismatic charm that enhances the aesthetic appeal of a space. These surfaces come in colours that are soothing to the eyes and gives a rich look! Armano keeps growing with the latest trends of interior design and architectural styles. We bring together the combination of creativity and comfort by designing tiles by using the latest technology.

600x
600MM



600x
600MM



Usage Areas

Crafted with a full-body design, the color permeates throughout the tile, ensuring uniformity and longevity even under the most demanding conditions. This feature makes the Express Series the optimal choice for high-frequency areas, where durability is paramount. These tiles are perfect for places like Parking lots, Hallways, Schools, Airports, Malls, Hotels and Big Commercial sites. Plus, They're just as great for Homes, especially outdoor spots like decks that take a beating from daily use.



INTERIOR



BATHROOM



RESIDENTIAL



COMMERCIAL



HOSPITALS



URBAN
CENTERS



GYM





Specifications Of Products

Full-body tiles, sized at 600x600mm and 8mm thick, epitomize durability and versatility. Composed of porcelain or ceramic, their uniform composition ensures resilience throughout. With a low water absorption rate, they excel in wet areas like bathrooms and kitchens. Surface finishes vary from polished to matte, catering to diverse aesthetic preferences. Their resistance to stains, scratches, and fading makes maintenance hassle-free. Ideal for floor and wall applications, these tiles adorn residential and light commercial spaces alike. Available in an array of colors and designs, they offer endless possibilities for creative expression. Full-bodied and functional, they elevate interiors with enduring elegance and practicality



FREEZE
RESISTANCE



SOLID
BODY



EASY TO
MAINTAIN



ECOLOGICAL &
SUSTAINABLE



ZERO
MAINTENANCE




ZERO
MAINTENANCE



LOW WATER
ABSORPTION



IMPACT
RESISTANCE

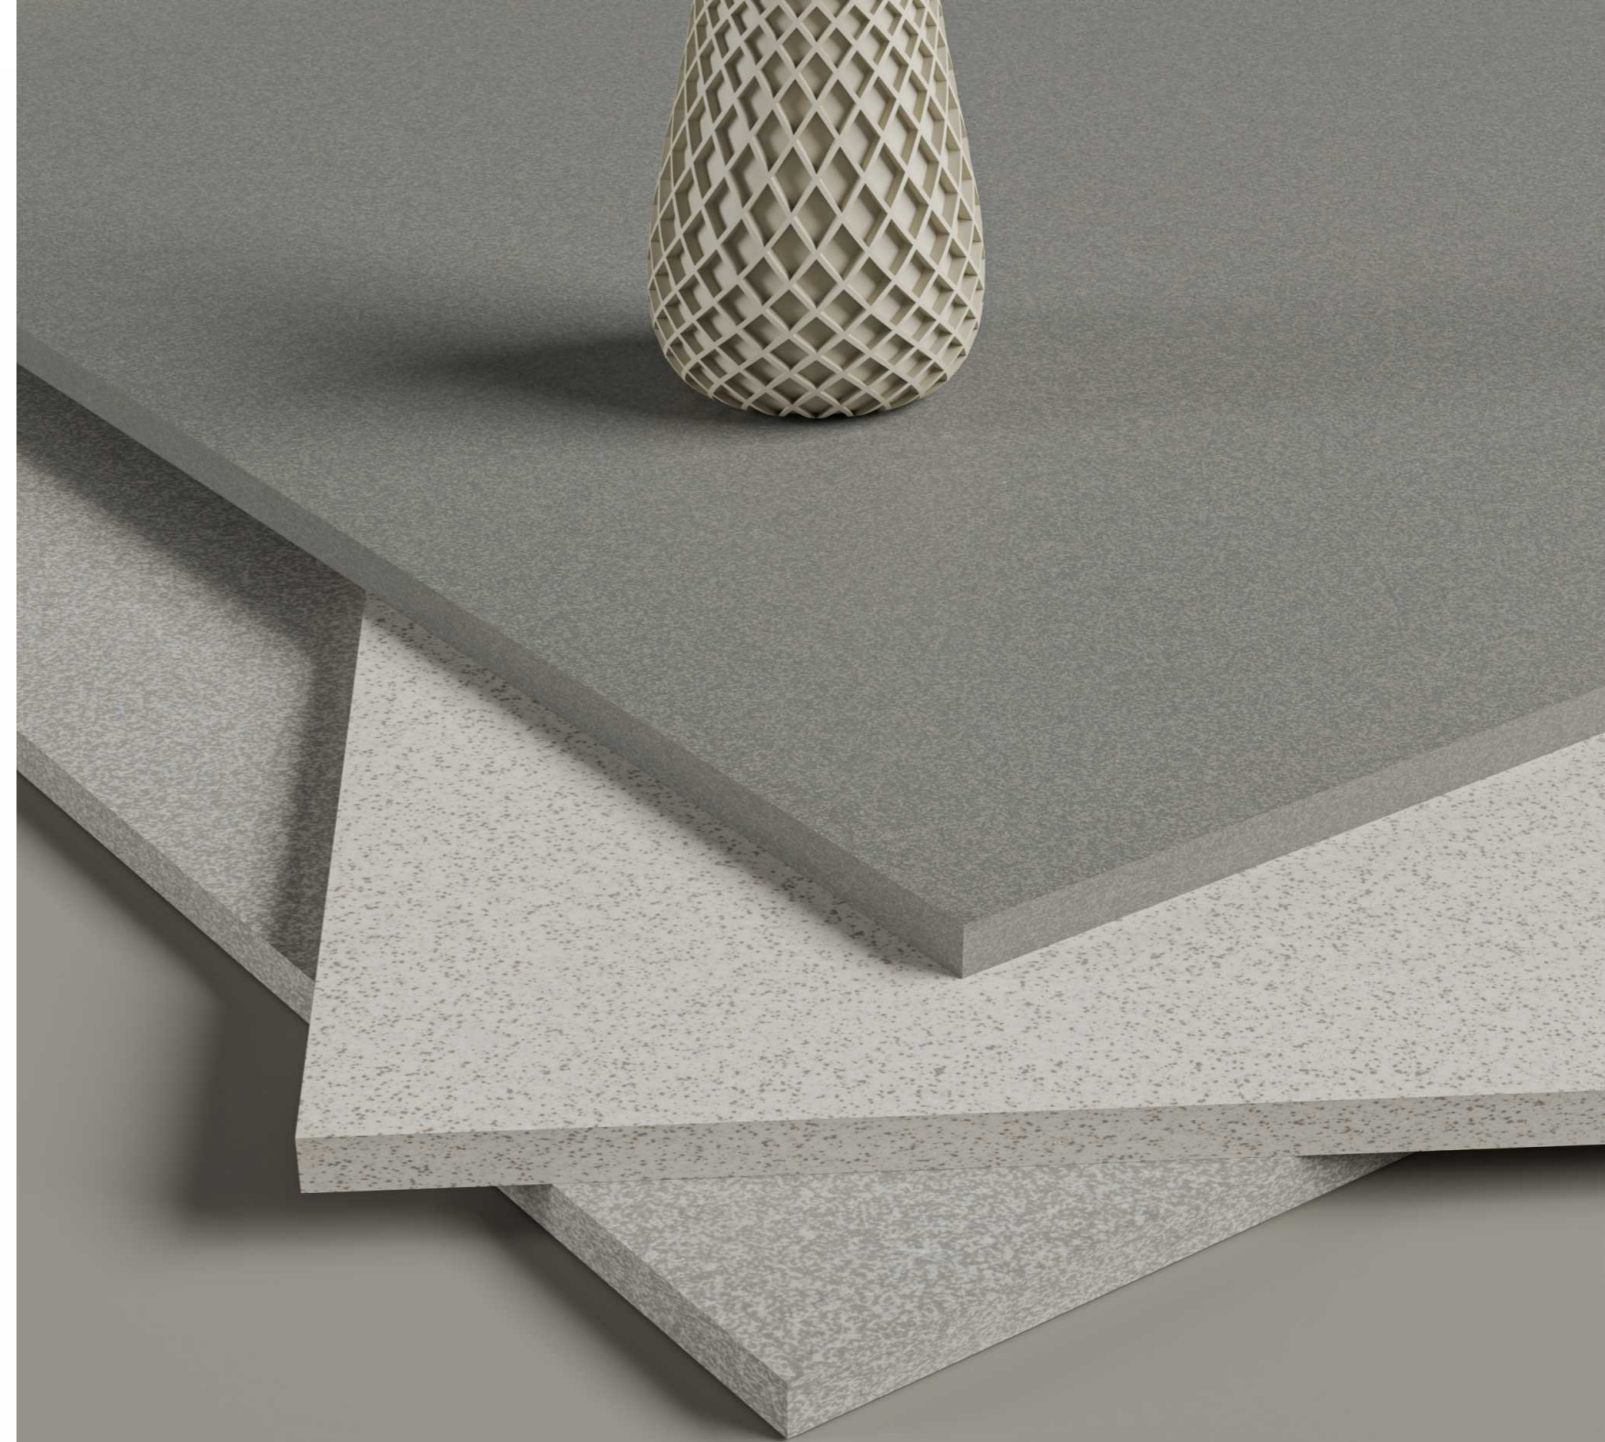

www.armanovitrified.com


8MM
Thickness

Full
Body
tiles

Design Name:

**Express
Carbon**

Finish	Thickness	600x
MATT	8MM	600MM

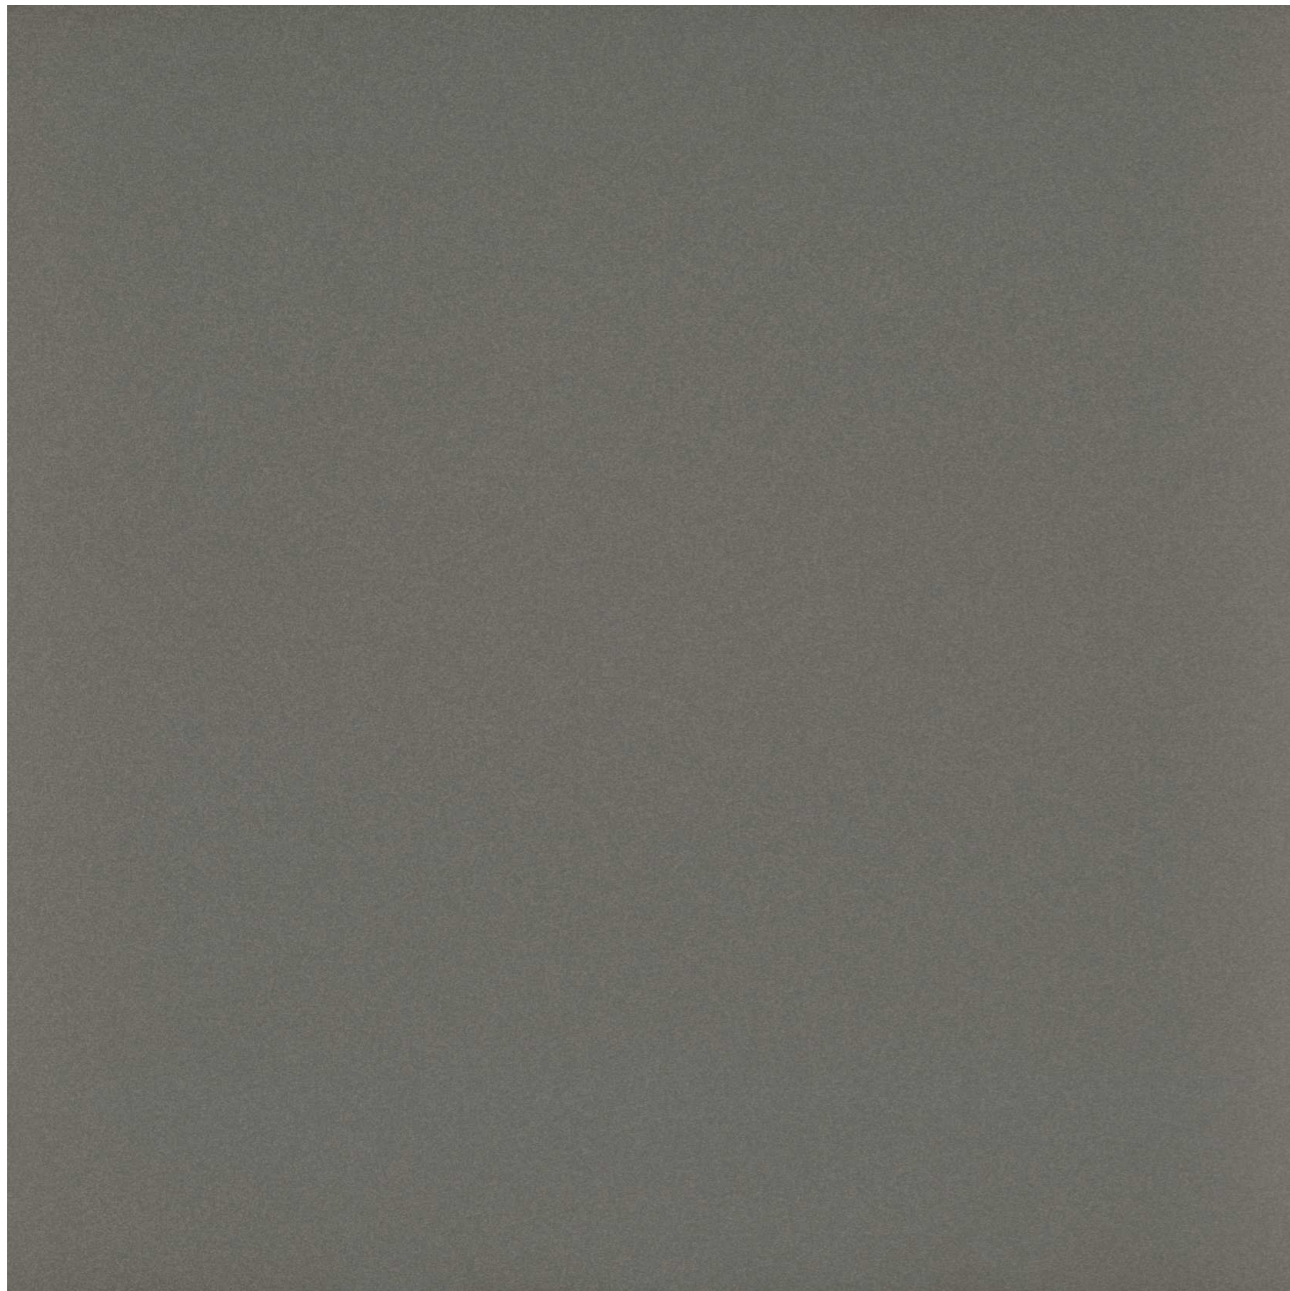




Express
Carbon

Design Name:

**Express
Choco**

Finish	Thickness	600x
MATT	8MM	600MM

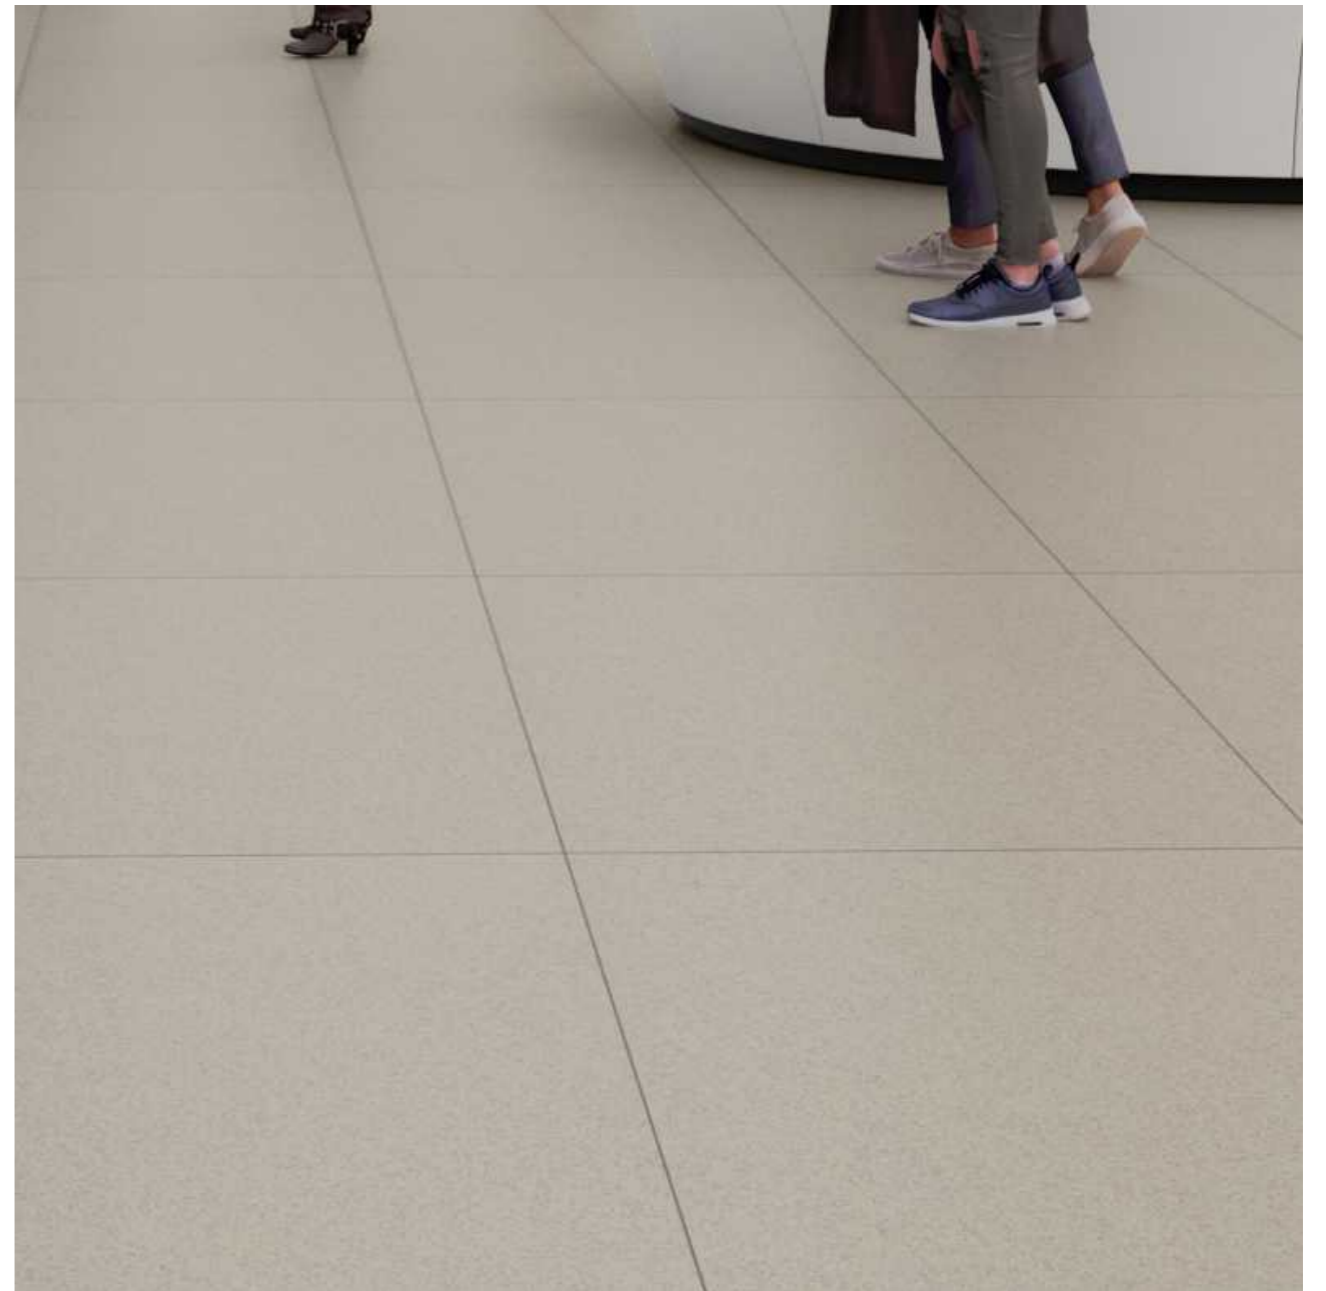




Express
Choco

Design Name:

**Express
Dessert**

Finish	Thickness	600x
MATT	8MM	600MM

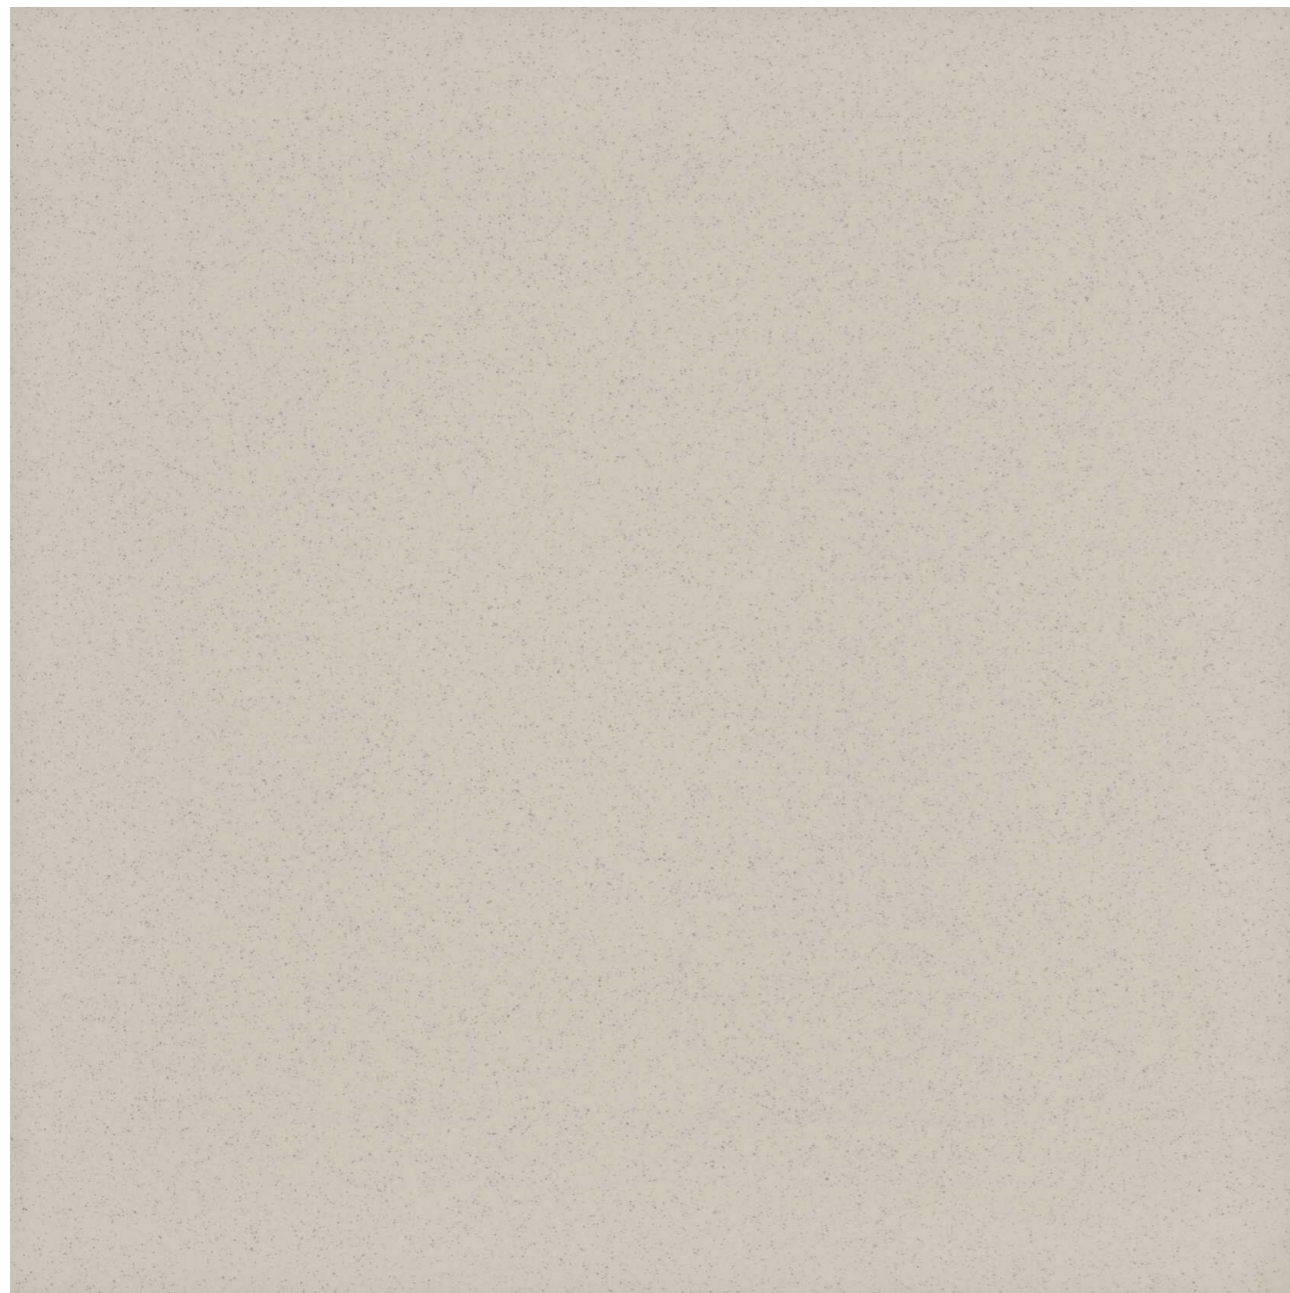




Express
Dessert

Design Name:

**Express
Earth**

Finish	Thickness	600x
MATT	8MM	600MM

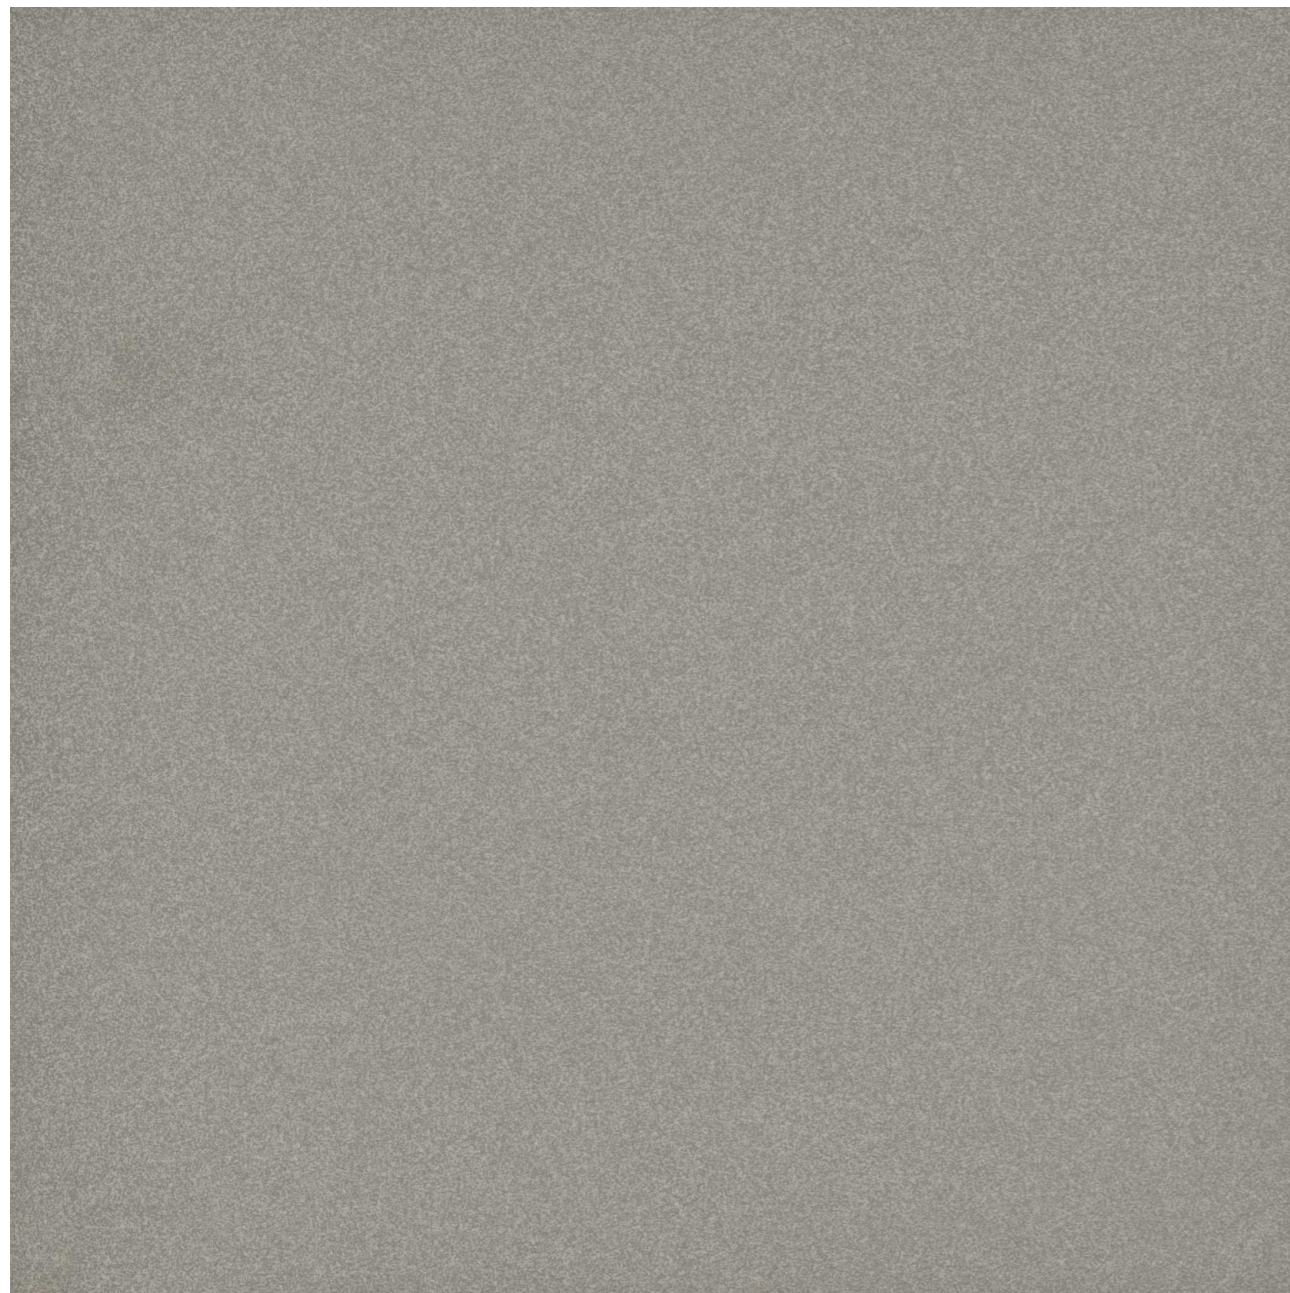




Express
Earth

Design Name:

**Express
Lava**

Finish | Thickness | 600x
MATT | 8MM | 600MM

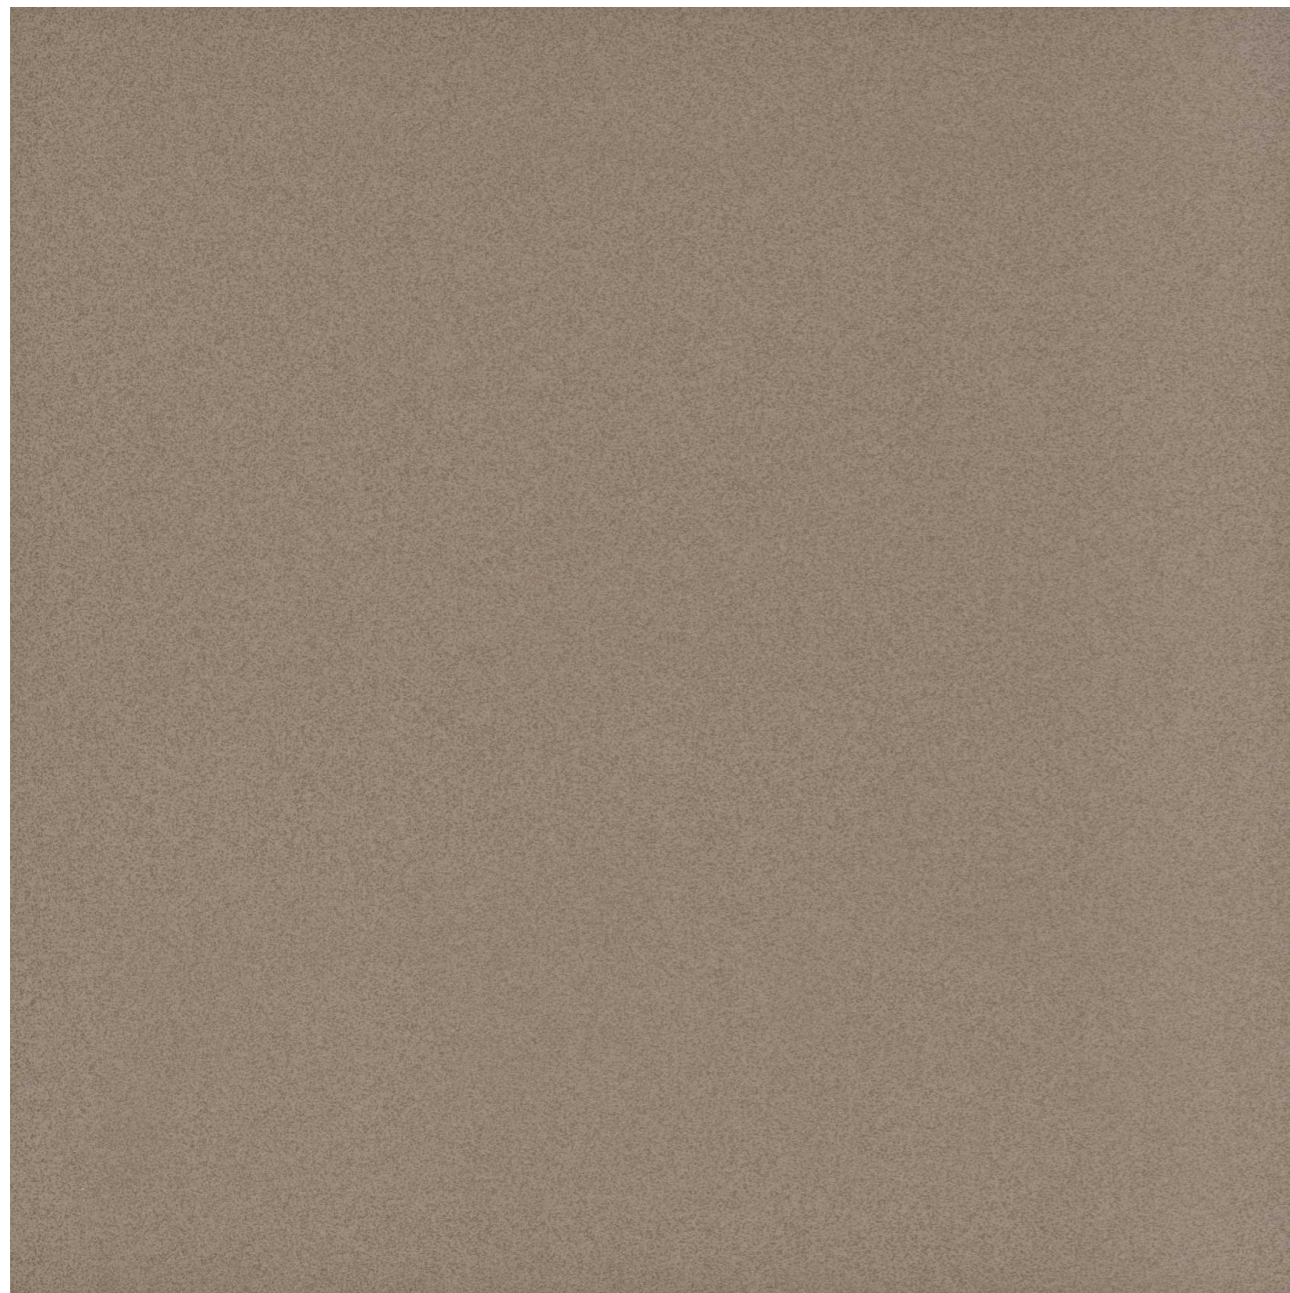




Express
Lava

Design Name:

**Express
Olive**

Finish	Thickness	600x
MATT	8MM	600MM

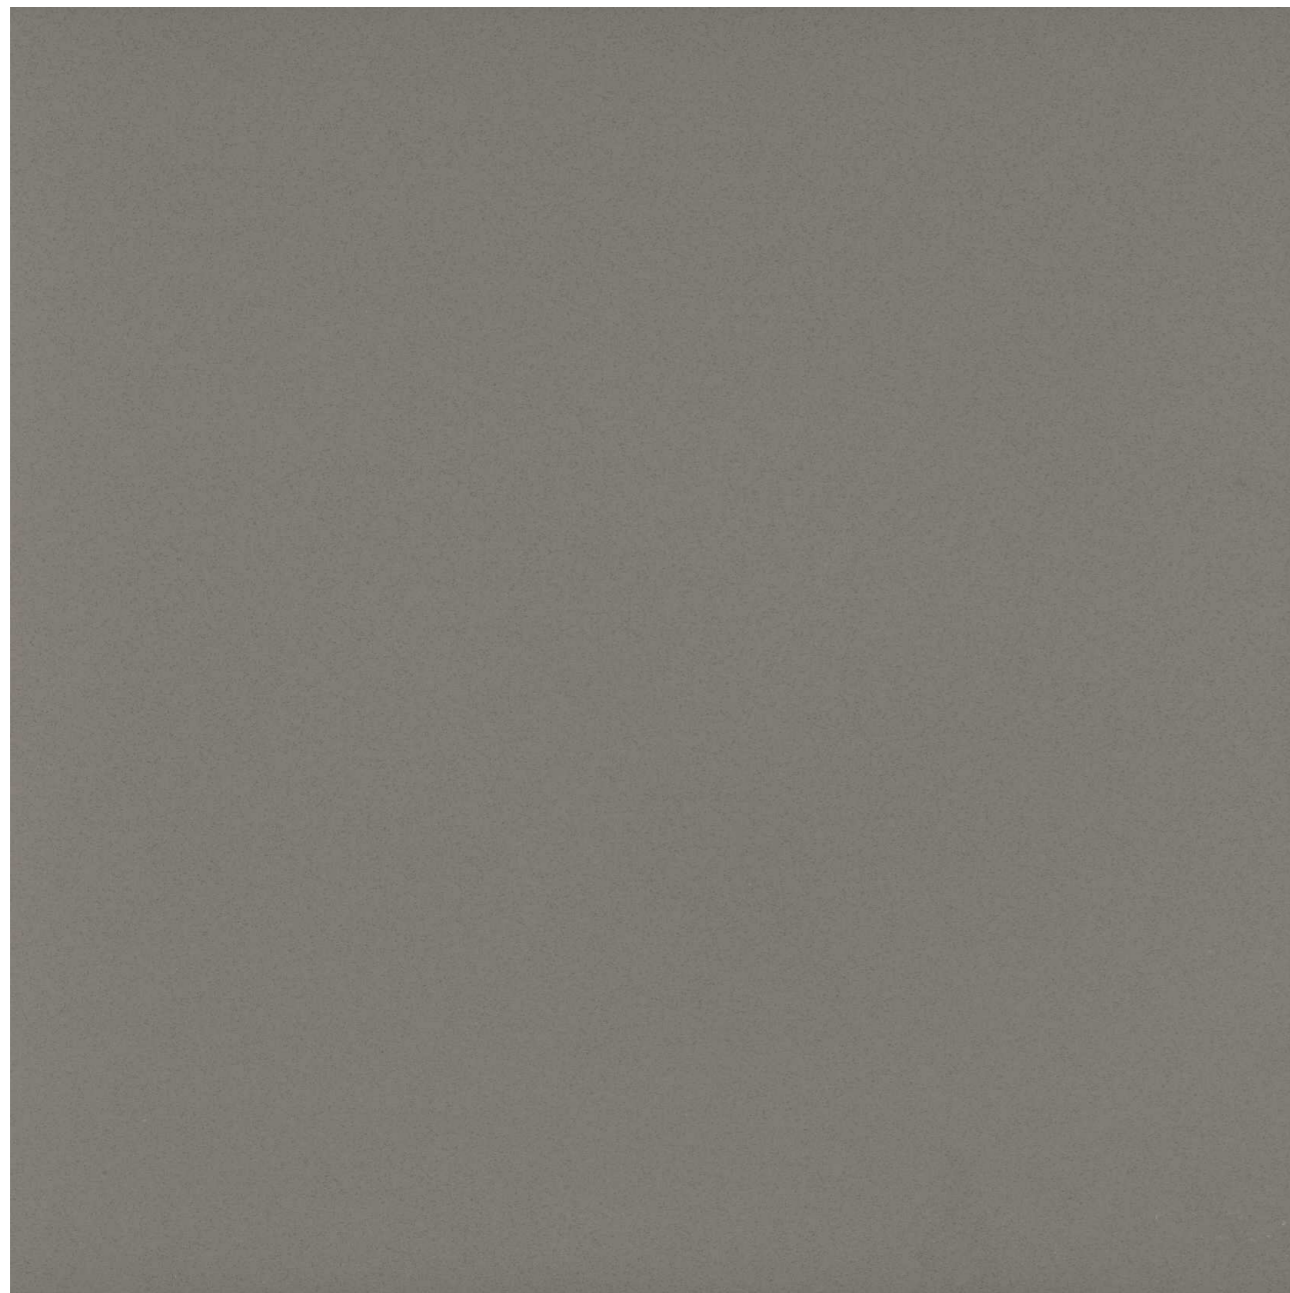




Express
Olive

Design Name:

**Express
Soil**

Finish	Thickness	600x
MATT	8MM	600MM

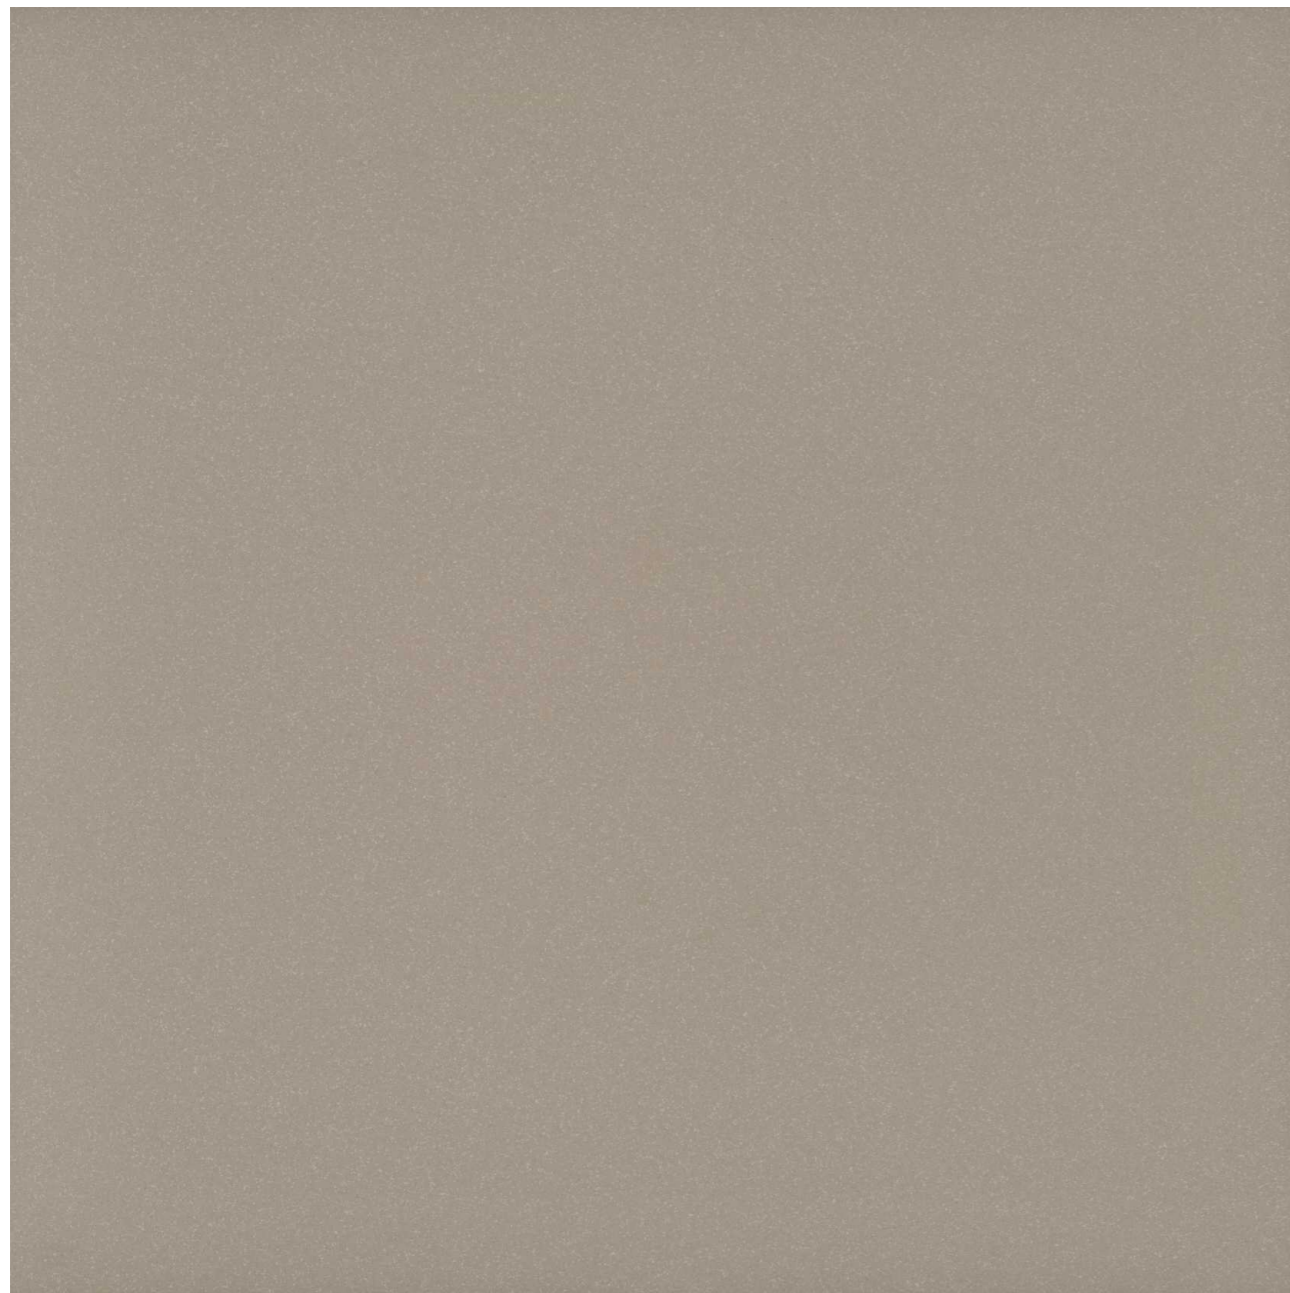



Express
Soil

Technical Specification

TECHNICAL DETAILS	STANDARD AS PER ISO-13006/EN176 GROUP BIa	MEAN VALUE OF FULL BODY VITRIFIED TILES	METHOD OF TEST
Deviation In Length & Width	±0.60%	±0.10%	ISO-10545-2
Deviation In Thickness	+5.00%	+2.00%	ISO-10545-2
Straightness Of Sides	±0.50%	±0.10%	ISO-10545-2
Surface Flatness	±0.50%	±0.10%	ISO-10545-2
Water Absorption	≤ 0.50%	E ≤ 0.03%	ISO-10545-3
Breaking Strength	1300 N	2000 N	ISO-10545-4
Abrasion Resistance	Max. 175mm	Max. 145mm ³	ISO-10545-6
Moh's Hardness	Min. 6	≤ 6*	En101
Frost Resistance	Frost Proof	Frost Proof	ISO-10545-12
Thermal Shock	No Damage	No Damage	ISO-10545-9
Moisture Expansion	Nil	Nil	ISO-10545-10
Thermal Expansion	<9 x 10 ⁻⁶	<5 x 10 ⁻⁶	ISO-10545-8
Resistance of House Hold Chemical	No Damage	No Damage*	ISO-10545-13
Stain Resistance	Resistance	Resistance*	ISO-10545-14
Slip Resistance(friction Co Efficient)	> 0.40	> 0.40	ISO-10545-17

SIZE	PCS./BOX	WEIGHT / BOX (Approx)		COVERAGE AREA / BOX
		POLISHED	MATT	
600x600mm	4 Pcs.	25 Kg.	25 Kg.	1.44 mtr ²